MOTOBATT

QuadFlex™ Battery


WWW.MOTOBATT.COM

MBTX24U






Brass Terminals (mm)

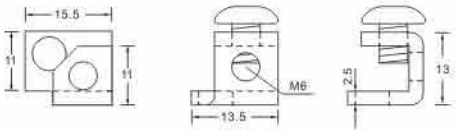

Terminal Screws: Stainless, M6 Thread
Fastener: 4mm Allen Hex

Physical Dimensions: (in./mm)

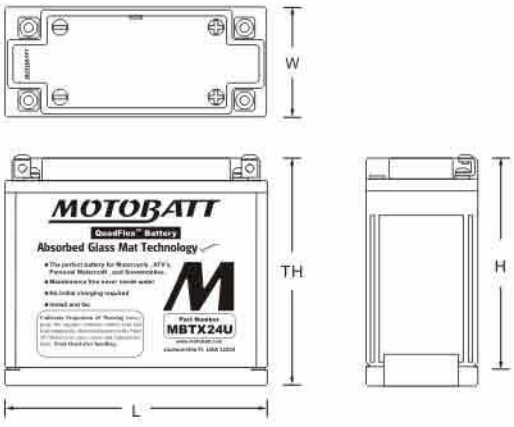

L:8.07(205) W:3.43(87) H:6.38(162)
TH.:6.93(176)

Tolerances are +/0.04in.(+/-1mm) and +/-0.08in.(+/-2mm) for height dimensions.

Features

- Patented Quad Terminal Design - Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

Performance Specifications

Nominal Voltage ---------- 12 volts (6 cells)

Nominal Capacity

20-hr. (1.25A to 10.50 volts)----------26AH
10-hr. (2.50A to 10.50 volts)---------- 25.0AH
5-hr. (5.0A to 10.20 volts)---------- 21.3AH
1C. (25.0A to 9.6 volts)---------- 41Min (16.8AH)
8C. (200A to 6.00 volts)---------- 3Min (10AH)

Approximate Weight ---------- 16.1 lbs. (7.30kg)

Energy Density (20-hr. rate) ---------- 1.77W-h/in^3 (108 W-h/l)

Specific Energy (20-hr. rate) ---------- 19.2W-h/lb (42.3 W-h/kg)

Internal Resistance (approx) ---------- 14 milliohms

CCA (-0.4°F/-18°C,7.2V,30S)---------- 285 amperes

CA (68°F/20°C,7.2V,30S)---------- 350 amperes

Shelf Life (% of nomomal capacityat 68°F (20°C)----- SOC% OCV

1 Months ---------- 97% 12.78V
3 Months ---------- 91% 12.7V
6 Months ---------- 83% 12.5V

Operating Temperature Range

Charge ---------- -4°F(-20°C) to 122°F(50°C)
Discharge ---------- -40°F (-40°C) to 140°F(60°C)

Case ---------- ABS

Carton Contents ----------1-MotoBatt MBTX24U Battery,
Fit spacers (1 bottom),4 stainless steel terminal screws, 2 brass terminals, 4mm Allen Wrench, Install / user manual.




RETAIL CARTON




"C" TERMINAL TERMINAL COVER SCREW WRENCH


Shelf life & Storage

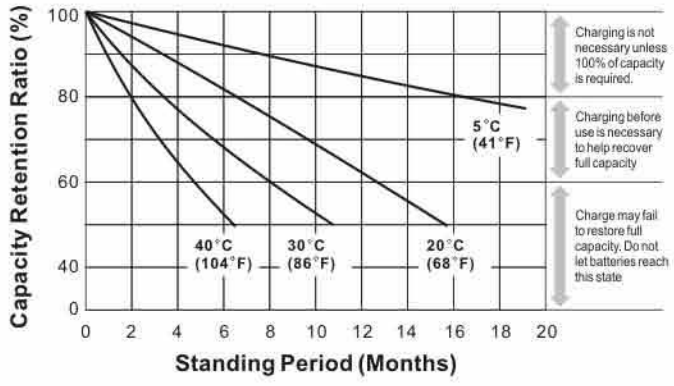


Discharge Characteristics

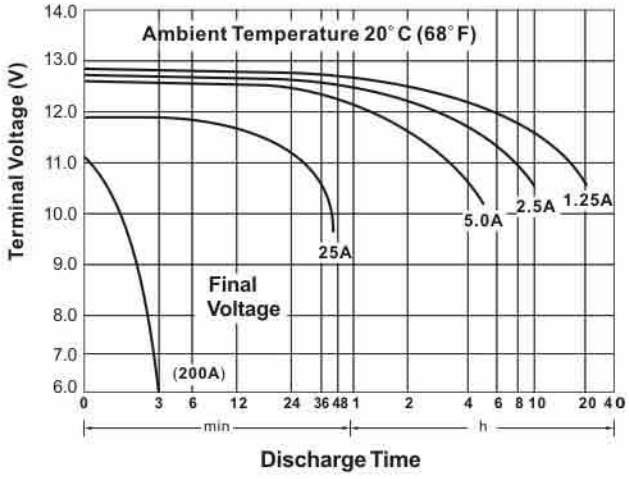

Discharge Time vs. Discharge Current

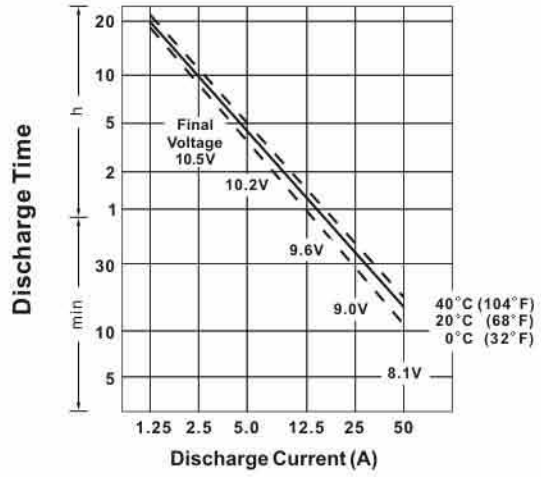

Life Characteristics in Cyclic Use

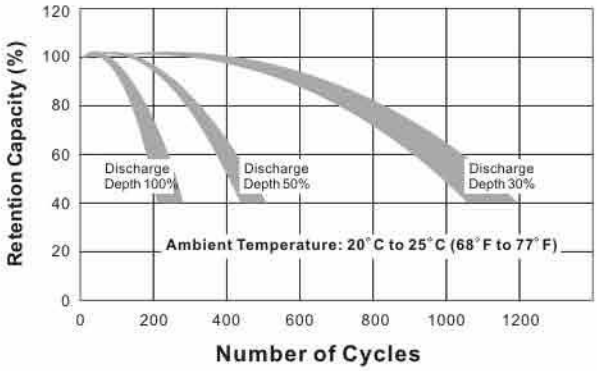

Charging

Cycle Applications: limit initial current to 7.5A. Charge until battery votage (under charge) reaches 14.8 to 15.0 volts at 68°F(20°C). Hold at 14.8 to15.0 volts until current drops to under 500mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Can be used to replace

12N183	12N183A	Y50N18AA	Y50N18LA
Y50N18LA2	Y50N18LA3	Y50N18LACX	SY50N18LA
SY50N18LAT	YTX24HLBS	YTX24HL	

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 4A. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models.or contact us at www.motobatt.com

Further Information

Please refer to our website www.motobatt.com to locate a distributor in your area.